


392°F / 200°C High Temperature & Heat Resistant Silicone Sponge Cord

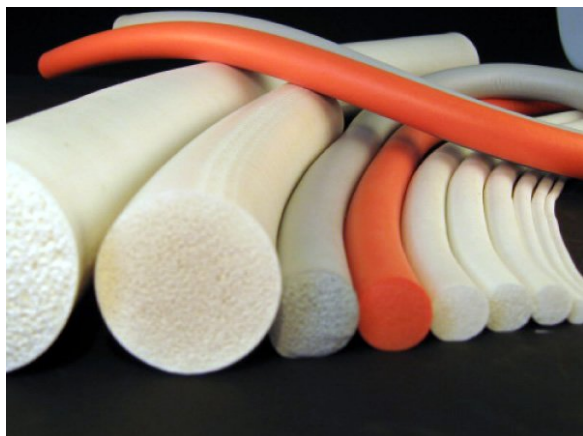

- Suitable for continuous operation from -80°F (-62°C) to 392°F (200°C).
- Depending on media and application useful life at temperatures up to 425°F (218°C) may be obtained.
- Density 16lb per cubic foot
- Compression recovery; 25% deflection: 100% at room temperature. Lower at elevated temperatures
- Thermal value: 0.0695 W(M.K)
- Tensile strength 65 Newtons

| High Temperature, Heat & Flame Resistant Silicone Sponge Cord | | | | |
|---|---------------------|------------------------|--------|-----------------|
| Size: .062" to 1.000" (1.8mm to 14.3mm) | | | | |
| Part Number | Diameter in / mm | Spool Length ft / m | Color | Price per Spool |
| R-SSC-M0016 | .062 / 1.57 | 50 / 15.24 | Blue | \$ 49.50 |
| R-SSC-M0031 | .125 / 3.17 | 50 / 15.24 | Black | \$ 57.12 |
| R-SSC-M0047 | .187 / 4.74 | 50 / 15.24 | Red | \$ 63.33 |
| R-SSC-M0055 | .218 / 5.53 | 50 / 15.24 | Red | \$ 94.48 |
| R-SSC-M0063 | .250 / 6.35 | 50 / 15.24 | Grey | \$ 97.37 |
| R-SSC-M0079 | .312 / 7.92 | 50 / 15.24 | Blue | \$ 112.54 |
| R-SSC-M0095 | .375 / 9.52 | 50 / 15.24 | Red | \$ 183.21 |
| R-SSC-M0110 | .437 / 11.09 | 50 / 15.24 | Grey | \$ 216.87 |
| R-SSC-M0127 | .500 / 12.70 | 25 / 7.62 | Orange | \$ 135.68 |
| R-SSC-M0158 | .625 / 15.87 | 25 / 7.62 | Grey | \$ 180.53 |
| R-SSC-M0190 | .750 / 19.05 | 25 / 7.62 | Red | \$ 258.93 |
| R-SSC-M0222 | .875 / 22.22 | 25 / 7.62 | Grey | \$ 327.54 |
| R-SSC-M0254 | 1.000 / 25.40 | 25 / 7.62 | Blue | \$ 394.68 |