


**Braided Fiberglass Vehicle Truck Engine Exhaust Pipe Sleeve**  
**1200°F / 648°C: Continuous Rating – Higher Temperature for Shorter Periods**  
**BlackMax™ High Temperature & Heat Resistant**

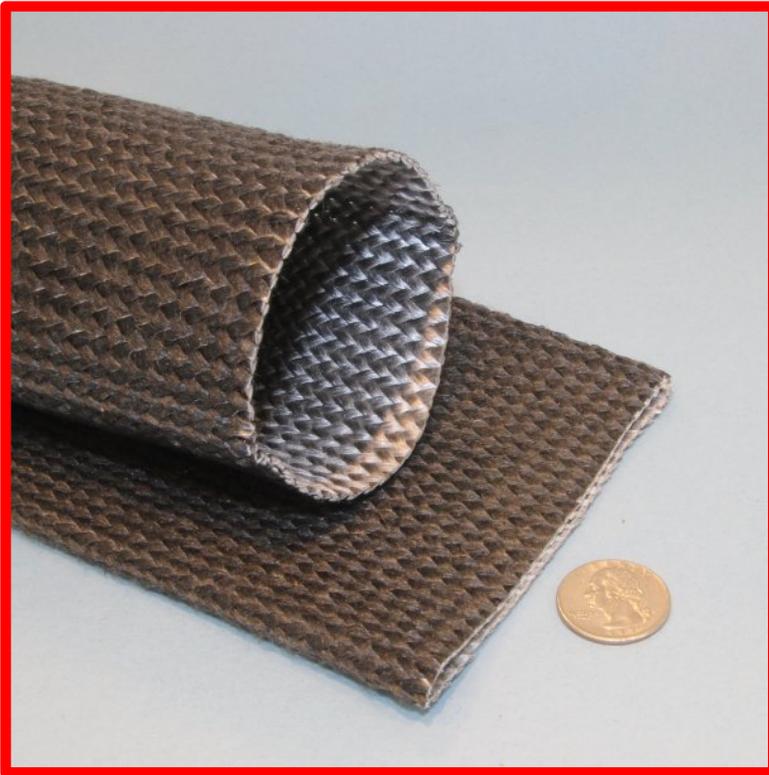

- 1/16" wall thickness
- Acrylic saturant added for enhanced ease of handling and anti-fray

Designed as a protection sleeve for truck & generator engine exhaust piping.

Easy to cut and maintains its end shape for ease of installation. Easily secured with stainless clamps.

Black color hides dirt and grime contamination.

Protects Personnel from incidental contact burns.

Helps prevent fires due to spray from ruptured hydraulic or fuel supply lines contacting hot exhaust metal directly.

**1200°F / 648°C continuous rating, high insulation value & excellent personnel protection**

Very High-Temperature Braided Saturated Sleeve with Acrylic Saturant – Exhaust Pipe Protection Sleeve				
Part Number	Size			Price per foot
	in	mm	-dash	
S-FG-BM-EX-M102-64	4.000	102	-64	\$ 15.36
S-FG-BM-EX-M114-72	4.500	114	-72	\$ 17.65
S-FG-BM-EX-M127-80	5.000	127	-80	\$ 19.64

**This Product is Available By The Foot**