


Kevlar® Braided Aramid Sleeve - Standard Wall

320°F / 160°C: Continuous Rating – Higher Temperature for Shorter Periods

FlameShield™ High Temperature, Heat Resistant High Strength & Cut Resistant

Expandable Sleeve - Premium Grade – Standard Wall Thickness

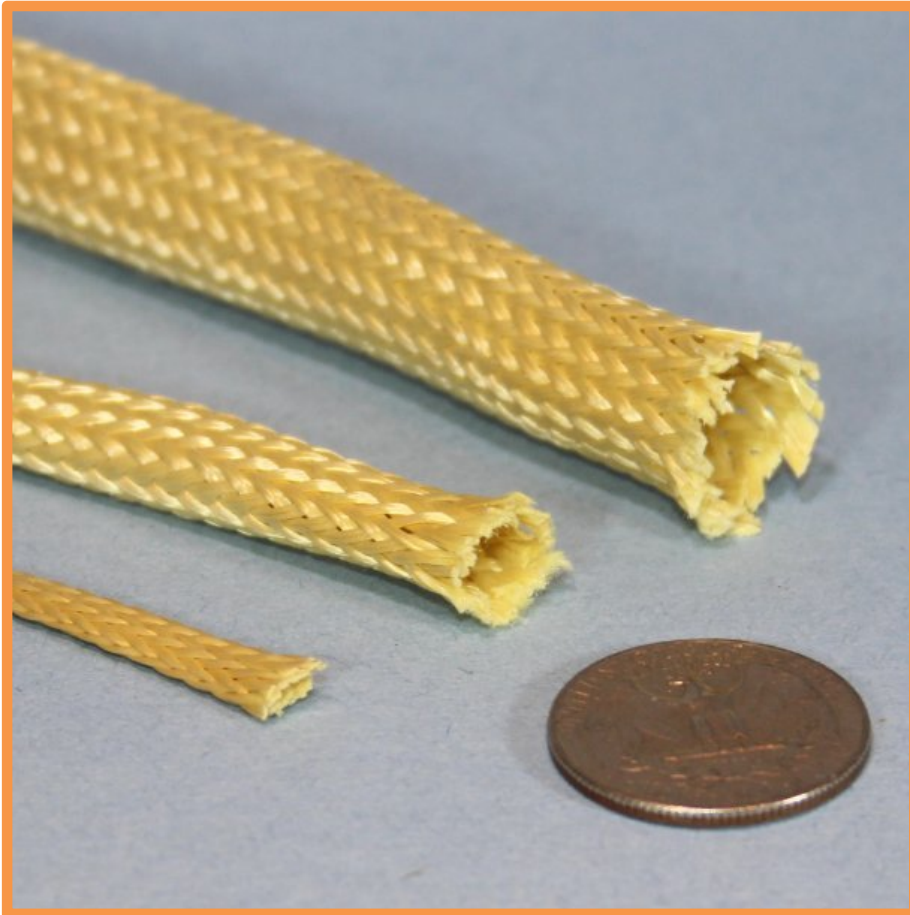

Kevlar sleeve is soft and pliable, highly flexible.

Halogen & asbestos free.

Fibers are 20 times stronger than steel for the same diameter. Highly cut resistant.

Braid angle allows this sleeve to expand/contract slightly to accommodate irregular surfaces and turns, splices and in-line connectors. Expansion does cause surface coverage to reduce slightly.


Available in natural (yellow) color.

.045" / 1.14 mm wall thickness.

This product is made from genuine Kevlar®.

**320°F / 160°C maximum continuous rating with high insulation value
& excellent personnel protection. Short term exposure to 572°F / 300°C**

Kevlar® Braided Aramid Sleeve - Standard Wall (Continued)
320°F / 160°C: Continuous Rating – Higher Temperature for Shorter Periods
FlameShield™ High Temperature, Heat Resistant High Strength & Cut Resistant
Expandable Sleeve - Premium Grade – Standard Wall Thickness



FlameShield™ High Temperature & Heat Resistant Braided Kevlar® Aramid Sleeve – Standard Wall – Premium Grade

Part Number	Nominal ID	Size Range	Spool Length in feet Bulk / Small	Price per Spool Bulk Spool / Small Spool
S-K-SW-M006-04-X	1/4" / 6 mm	1/8" to 5/16"	500 / 50	\$ 291.25 / \$ 42.37
S-K-SW-M013-08-X	1/2" / 13 mm	5/16" to 5/8"	250 / 50	\$ 373.76 / \$ 87.25
S-K-SW-M019-12-X	3/4" / 19 mm	9/16" to 1"	250 / 50	\$ 561.24 / \$ 124.75
S-K-SW-M025-16-X	1" / 25 mm	3/4" to 1 1/8"	200 / 25	\$ 599.21 / \$ 87.37
S-K-SW-M032-20-X	1 1/4" / 32 mm	1" to 1 1/2"	125 / 25	\$ 467.54 / \$ 106.43
S-K-SW-M038-24-X	1 1/2" / 38 mm	1 1/4" to 1 3/4"	100 / 25	\$ 516.75 / \$ 141.70
S-K-SW-M044-28-X	1 3/4" / 44 mm	1 1/2" to 2"	100 / 25	\$ 650.00 / \$ 195.00
S-K-SW-M051-32-X	2" / 51 mm	1 3/4" to 2 1/4"	100 / 25	\$ 801.37 / \$ 212.75
S-K-SW-M064-40-X	2 1/2" / 64 mm	2 1/4" to 2 3/4"	100 / 25	\$ 847.50 / \$ 254.25
S-K-SW-M076-48-X	3" / 76 mm	2 3/4" to 3 1/4"	100 / 25	\$ 1052.50 / \$ 315.75
S-K-SW-M089-56-X	3 1/2" / 89 mm	3 1/4" to 3 3/4"	100 / 25	\$ 1477.50 / \$ 443.25
S-K-SW-M102-64-X	4" / 102 mm	3 3/4" to 4 1/4"	100 / 25	\$ 1712.50 / \$ 513.75

For the "X" value: "F" for By-The-Foot followed by length in feet (example: F66 = 66 feet)
 use "B" for Bulk Spool size, use "S" for Small Spool size

This Product is available only in full Spools



Kevlar products are difficult to cut due to their strength. Regular or heavy duty scissors can sometimes cut these materials, but often fail quickly as the Kevlar quickly dulls the cutting edge.

Kevlar Shears are specifically designed to cut Kevlar, and feature a serrated blade (or dual serrated blades) so that the fibers don't slip while cutting, holding the fiber in position and allowing for a greater shear force to be applied by the opposing blade.

These shears are Extra Heavy Duty, and can be used for other materials such as cutting steel wires and steel tie wraps. Part number TL-S-KEV-HD. Priced from \$52.00 to \$79.00 depending on blade length.

Kevlar® is a registered trademark of E. I. Du Pont de Nemours and Company